




1. Before replacing diverter be sure the water is turned off.
 - Remove cap from diverter mechanism.



2.
 - Unscrew diverter handle.



3.
 - Using a wrench, loosen diverter mechanism from faucet body.

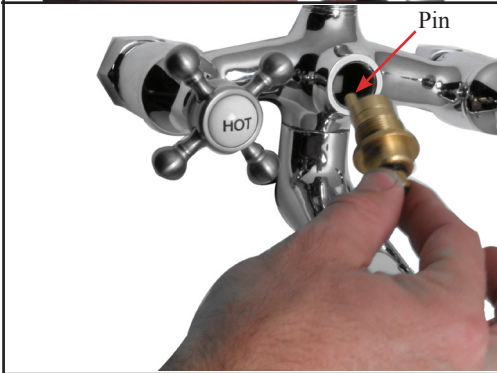

4.
 - Remove diverter mechanism from faucet body.



5. • Remove spout from faucet by removing set screw at the back of Faucet body.

6. • Remove diverter.

- Install new diverter and reverse the order for installation, make sure pin engages with the diverter mechanism.

Turn water back on.

Double check the entire installation regarding function, leakage and its general look.