





Cheviot

PRODUCTS INC

Model # 6050

INSTRUCTIONS

1. Prepare the installation site by securing a platform 2-5/8" below the finished surface of the floor (special care should be taken when calculating the depth of the platform).
2. Secure the baseplate to the platform using the three included screws. If attaching to concrete, anchors should be used to ensure adequate support.
3. Insert the base sleeve into the faucet body so that the hot and cold water supply hoses protrude from the bottom of the sleeve.
4. Install the 1/2" adaptor with supply hoses. Connect the hot and cold water supply hoses to the water main and test the connection.
5. Secure the faucet assembly by aligning the unit over the baseplate and twisting clockwise until locked.
6. Attach the hand shower hose to the outlet located on the bottom side of the spout. Do not attach the hand shower head.
7. Remove the aerator and run cold and hot water through the spout for one minute each. Run hot water through the hand shower hose for one minute. This will clear any debris left in the line.
8. Reinstall the aerator and attach the hand shower head.
9. Once the floor has been finished, secure the faucet to the floor using the four provided screws. Cover the screw heads with the flange.

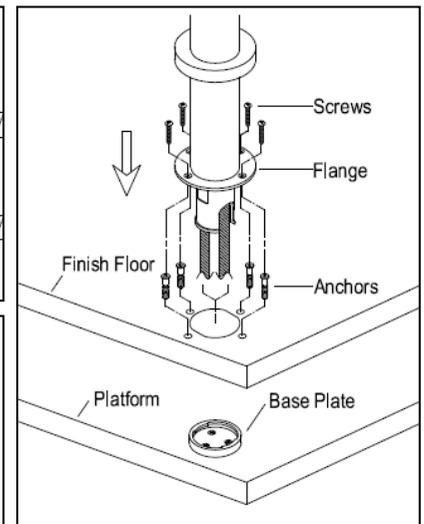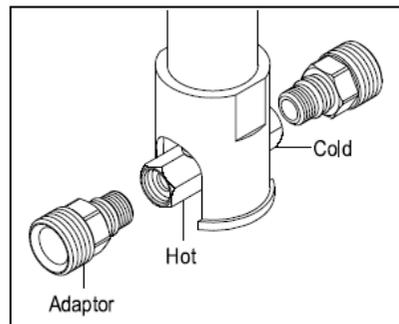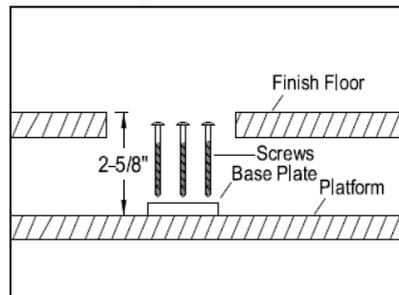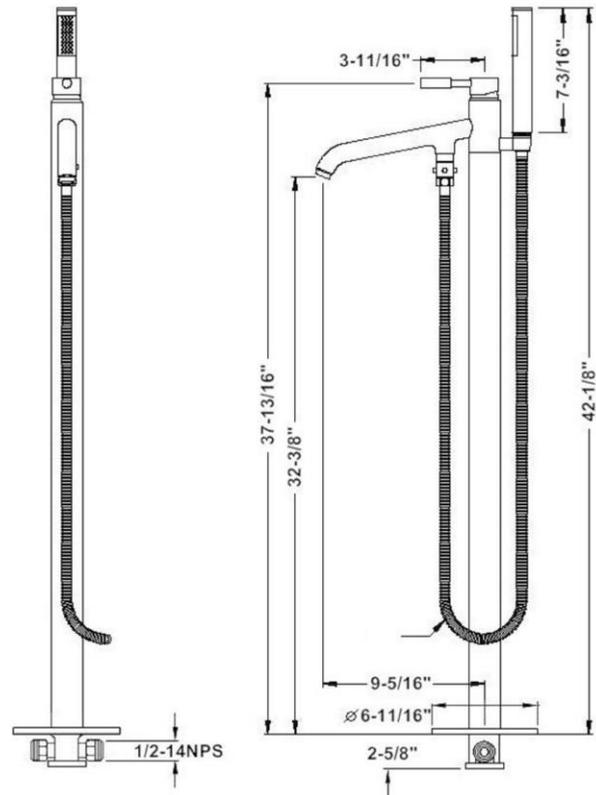

CARE AND MAINTENANCE

Minimum Maintenance is required to maintain product finish. With proper maintenance your CHEVIOT Faucet will continually look like new. Special care should be taken when cleaning your faucet and the following suggestions should help extend your faucet life.

- a) Cleaning should be done regularly using a soft cotton cloth and warm water, then towel dry.
- b) Do not use cleaners that contain abrasives or harsh chemicals; Care should be taken in selecting cleaning supplies. Many cleaners contain detergents, ammonia, or other corrosive solvents that could damage your faucet finish.
- c) Occasionally clean with a non-abrasive wax polish.

Tel : (800)-444-5969

www.cheviotproducts.com

M12-099